

Weld Schedule Manager (Fill & Cap)

WPS No	July test weld 5	Position	Fixed 5G - Down	Diameter (in)	48	Wall (mm)	13.7
Process	GMAW	Specification	API1104	Filler Wire	Lincoln Pipeliner ER70-S6 (1.2mm)	Shield Gas	Ar/C02 85/15
Bevel Design	30 degree	Material Grade	X70	Trade Name	Sure-arc	Completed by	Ben Hatch



0° Position	
Travel Speed	15
Torch Angle	0

30° Position	
Travel Speed	16
Torch Angle	-5

60° Position	
Travel Speed	18
Torch Angle	-10



90° Position	
Travel Speed	20
Torch Angle	-10

120° Position	
Travel Speed	18
Torch Angle	-10

150° Position	
Travel Speed	14
Torch Angle	-10

180° Position	
Travel Speed	10
Torch Angle	-10

Wire Diameter	1.2
Direction of Travel	Vertical Down
Process	Pulse
Deposition Ratio	12
Shield Gas Flow (L/min)	26

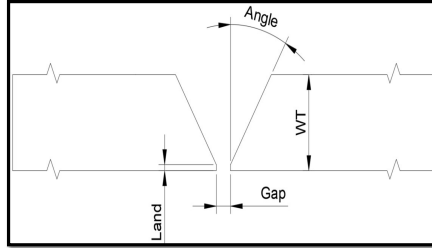


Joint Geometry		Tolerance (+ / -)	
Wall Thickness (mm)	13.7	1	0.5
Land (mm)	1	0.5	0.5
Root Gap (mm)	3	1	1
Bevel Angle (°)	30	5	5
Hi / Low (mm)		1.5	1.5



Stop / Start	
Stager the Stop-Start (mm)	30
Over run the next pass (mm)	12
Lead in at re-start (mm)	10

Weld Characteristics	
Deposition Efficacy	0.98
Pass Volume (mm2)	12.5
Min Cap Width (mm)	22
Root Depth (mm)	6
Total Passes (Inc root)	9

Total Arc Time (mins)	21.4
Wire Consumption (lb)	6
Wire Consumption (kg)	3

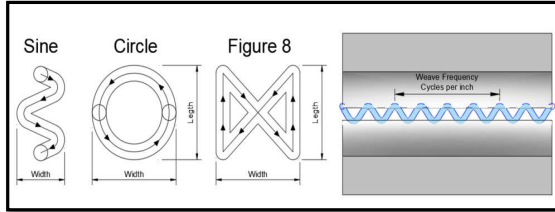

	Weave Adjustment					Weld Adjustment					Cleaning / Grinding					Comments
	Weave Pattern	Width (mm)	Legth (mm)	Dwell (sec)	Frequency / inch	Deposition Adjustment	Travel Speed Adjustment	Pass Volume	Pass Time	Arc Legth	Grind Prior to Weld Pass	Grind After Weld Pass	Travel Speed (in/min)	Weave Amplitude	Frequency Hz	
Hot Pass 0mm	Sine	1.5	2.0	0.0	12	-20%	-20%	10.6	2.9	2	OFF	ON	75	1	2	
Hot Pass 1mm	Sine	1.5	2.0	0.0	12	-10%	-10%	12.0	2.6	2	ON	OFF	75	1	2	
Hot Pass 2mm	Sine	1.5	2.0	0.0	12	-10%	-10%	12.0	2.6	2	ON	OFF	75	1	2	
Hot Pass 3mm	Sine	1.5	2.0	0.0	12	-10%	-10%	12.0	2.6	2	ON	OFF	75	1	2	
Hot Pass 4mm	Sine	1.5	2.0	0.0	12	0%	0%	13.3	2.3	2	ON	OFF	75	1	2	
Hot Pass 5mm	Sine	2.0	2.0	0.0	12	0%	0%	13.3	2.3	2	ON	OFF	75	1	2	
Fill Passes	Sine	2.0	2.0	0.0	12	0%	0%	13.3	2.3	3	ON	OFF	75	1	2	
Cap Passes	Sine	3.5	3.5	0.0	12	0%	0%	13.3	2.3	4	ON	ON	75	1	2	

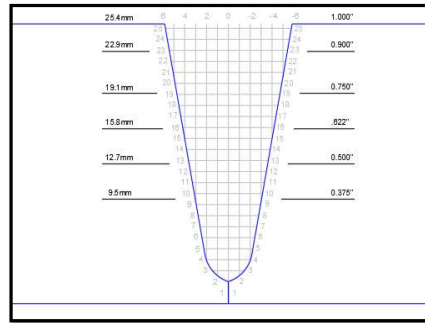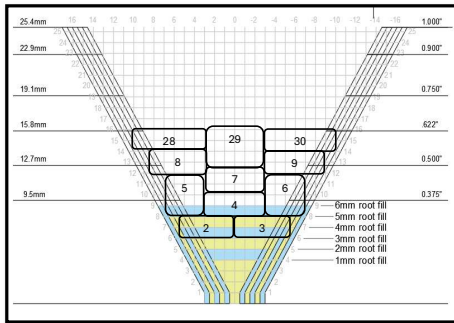

Pass #	On/Off	Pass Type	0mm		1mm		2mm		3mm		4mm		5mm		Comments
2	ON	Hot Pass	4.0	2.0	5.0	2.5	5.0	3.0	5.0	3.0	5.0	3.5	6.0	4.0	
3	ON	Hot Pass	4.0	-2.0	5.0	-2.5	5.0	-3.0	5.0	-3.0	5.0	-3.5	6.0	-4.0	
4	ON	Fill Pass	6.0	0.0	8.0	0.0	8.0	0.0	8.0	0.0	8.0	0.0	9.0	0.0	
5	ON	Fill Pass	6.0	3.5	8.0	4.0	8.0	4.5	8.0	4.5	8.0	5.0	9.0	5.5	
6	ON	Fill Pass	6.0	-3.5	8.0	-4.0	8.0	-4.5	8.0	-4.5	8.0	-5.0	9.0	-5.5	
7	ON	Fill Pass	8.0	0.0	9.0	0.0	9.0	0.0	9.0	0.0	9.0	0.0	10.0	0.0	
8	ON	Fill Pass	10.0	4.0	11.0	4.5	11.0	5.0	11.0	5.0	11.0	5.5	12.0	6.0	
9	ON	Fill Pass	12.0	-4.0	13.0	-4.5	13.0	-5.0	13.0	-5.0	13.0	-5.5	14.0	-6.0	
10	OFF	Fill Pass	12.0	0.0	13.0	0.0	13.0	0.0	13.0	0.0	13.0	0.0	14.0	0.0	
11	OFF														
12	OFF														
13	OFF														
14	OFF														
15	OFF														
16	OFF														
17	OFF														
18	OFF														
19	OFF														
20	OFF														
21	OFF														
22	OFF														
23	OFF														
24	OFF														
25	OFF														
26	OFF														
27.0	OFF														
28.0	ON	Cap Pass	14.0	6.0	14.0	6.5	14.0	7.0	14.0	7.0	14.0	7.5	14.0	8.0	
29.0	ON	Cap Pass	14.0	0.0	14.0	0.0	14.0	0.0	14.0	0.0	14.0	0.0	14.0	0.0	
30.0	ON	Cap Pass	14.0	-6.0	14.0	-6.5	14.0	-7.0	14.0	-7.0	14.0	-7.5	14.0	-8.0	

Notes

Changes:
We increased the dep ratio from 11 to 12 to try and stop the sputtering on the bottom. We in increased the weave width on the fills and cap by 1mm to try and level out the fills and prevent it filling unevenly.

Results:

Suggestions: